

LED

bullauge 6 SYSTEMLEUCHE bu6-1200-G4



Die Wand-, Decken- und Pendelleuchte bu6 (LED) ist jetzt in der vierten Generation erhältlich. Durch die opake Plexiglasscheibe und die gleichmäßige Anordnung der LEDs entsteht eine diffuse und sehr homogene Leuchtfläche. Dank mawa-Verschluss ist eine Ein-Mann-Revision unkompliziert durchführbar. Die Pendelvarianten der bu6 mit einem Durchmesser von 1200 mm haben serienmäßig eine 4-fach-Parallelabhängung inkl. einem Anschlussbaldachin (ø76 mm).



- weiß matt (RAL 9016)
- weitere RAL-Farben auf Anfrage





bu6-1200-G4-...-wm





◀ 1200 ▶

bu6-1200-G4-...-wa
bu6-1200-G4-...-wa-u



◀ 1200 ▶

bu6-1200-G4-...-p
bu6-1200-G4-...-p-u



◀ 1200 ▶

(* Standardmaß)

bu6-1200-G4

Design: Martin Wallroth

Engineering: mawa design

Wand-, Wandabstands-, Decken- und Pendelleuchte, Aluminiumgehäuse pulverbesch., satinierendes Plexiglas 5 mm,

LED Modul standard G4:

Downlight: 147 W, Ra > 80

Lichtfarben / Lichtstrom: 3000 K / 25424 lm,

Uplight: 34 W, Ra > 80

Lichtfarben / Lichtstrom: 3000 K / 5790 lm,

Lebensdauer Standard-LED:

L80 > 54.000 h (IES LM-80 / TM-21)

EEI = A⁺⁺-A

bu6-1200-G4-3 1-10V dimmbar

bu6-1200-G4-4 DALI dimmbar

bu6-1200-G4-7 Phasen- und -abschnitt dim.

bu6-1200-G4-8 Push

Montagemöglichkeiten:

Wand- und Deckenmontage (-wm),

Wandanschlussplatte (-wa) mit 4 Distanzen, optional mit Uplight (-wa-u) Standardlänge 50 mm (andere Längen auf Anfrage),

Pendelabhängung (-p) inkl. Baldachin, 4-fach-Parallelabhängung und Zuleitung

optional mit Uplight (-p-u)

Gewicht: bu6-1200-wm 25 kg,

bu6-1200-wa 26 kg, bu6-1200-p 25 kg

LED



bullauge 6 SYSTEM LIGHT bu6-1200-G4

The wall, ceiling, and pendant light, bu6 (LED) is now available in its 4th generation. The opaque plexiglass pane and even arrangement of LEDs creates a diffused and very homogenous lighting surface. Thanks to the mawa-closure, maintenance of the light is easy to for one person to conduct. The pendant variation of the bu6, with a diameter of 1200 mm, includes the series canopy (Ø76 mm) with four parallel suspension cables for connection.

- white matt (RAL 9016)
- other RAL colors on request





bu6-1200-G4-...-wm





◀ 1200 ▶

bu6-1200-G4-...-wa
bu6-1200-G4-...-wa-u



◀ 1200 ▶

bu6-1200-G4-...-p
bu6-1200-G4-...-p-u



◀ 1200 ▶

(* standard size)

bu6-1200-G4

Design: Martin Wallroth

Engineering: mawa design

Wall-mounted, wall-spaced, ceiling-mounted and pendant luminaire, Aluminium housing powder-coated, satined plexiglass 5 mm,

LED module standard G4:

Downlight: 147 W, Ra > 80

Light colour / luminous flux: 3000 K / 25424 lm,

Uplight: 34 W, Ra > 80

Light colour / luminous flux: 3000 K / 5790 lm,

Life time LED standard:

L80 > 54.000 h (IES LM-80 / TM-21)

EEL = A⁺ - A

bu6-1200-G4-3 1-10V dim.

bu6-1200-G4-4 DALI dim.

bu6-1200-G4-7 Leading edge/trailing edge dim.

bu6-1200-G4-8 Push

Mounting possibilities:

Wall and ceiling-mounted (-wm),

Wall connecting plate (-wa) with 4 distances, optionally available with an uplight (-wa-u), standard length 50 mm (other lengths available on request),


Pendant light (-p) incl. canopy, 4 parallel suspension cables and electrical supply optionally available with an uplight (-p-u)

Weight: bu6-1200-wm 25 kg,


bu6-1200-wa 26 kg, bu6-1200-p 25 kg



bullauge 6 Serie bullauge 6 series SYSTEMLEUCHE SYSTEM LIGHT **bu6-1200-G4**

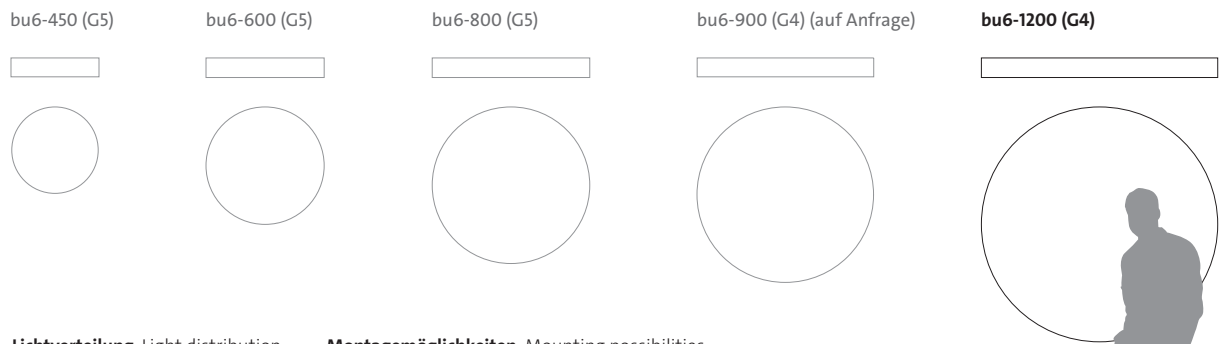

Lichtverteilung Light distribution



Montagemöglichkeiten Mounting possibilities

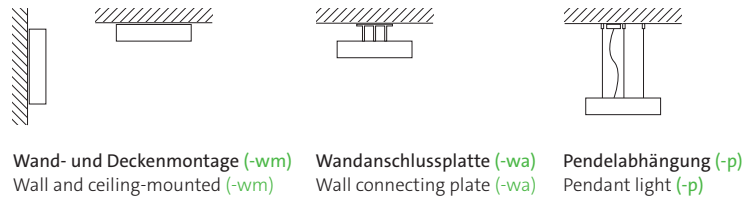


Foto: Stefan Wolf Lucks | Waldklinikum Eisenberg