

■ seventies se-21-1/-4/-5

STROMSCHIENENSTRAHLER BUSBAR SPOTLIGHT

mawa®

TECHNISCHE DATEN TECHNICAL DATA



Hersteller *Manufacturer:* mawa
 Artikel-Nr. *Article no.:* se-21-(1-5)
 Spannung *Line voltage:* 220 – 230 V
 Netzfrequenz *Power frequency:* 50/60 Hz
 Schutzklasse *Protection class:* I
 Schutzgrad *Degree of protection:* IP20

Leuchtmittel *Light source:* LED Citizen
 700 mA
 Leistung *Power:* 26 W
 EEI: A++ – A

Produktsreihe bauartgeprüft durch
 Product range assembling tested by




MÖGLICHE KONVERTER POSSIBLE DRIVERS


1. Roal / Strato 700 mA: 1 - 10 V
 Spannung *Voltage / AC:* 120 / 230 / 240 / 277 V~
 Dimmung *Dimming:* 10 – 100 %
 Strahlermaße *Spotlight*
dimensions: ø 90 mm / L: 150 mm

2. TCI JOLLY DALI BI / 700 mA: Dali
 Spannung *Voltage / AC:* 220 – 230 V~
 Dimmung *Dimming:* 0,5 – 100 %
 Strahlermaße *Spotlight*
dimensions: ø 90 mm / L: 180 mm


3. Cuvée Systems
 KCB-24E70ITD-R 5.1P-3 / 700 mA:
 Spannung *anschnittsdimmbar*
Voltage / AC: *trailing edge*
 Dimmung *Dimming:* 220 – 240 V~
 Strahlermaße *Spotlight* 1 – 100 %
dimensions: ø 90 mm / L: 180 mm



SCHALTPLAN WIRING DIAGRAM

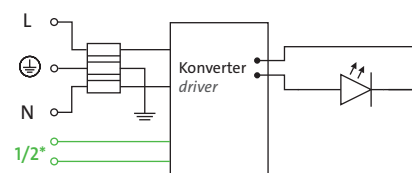

* 1. 1-10 V: + / -
 2. DALI: DALI 1 / DALI 2

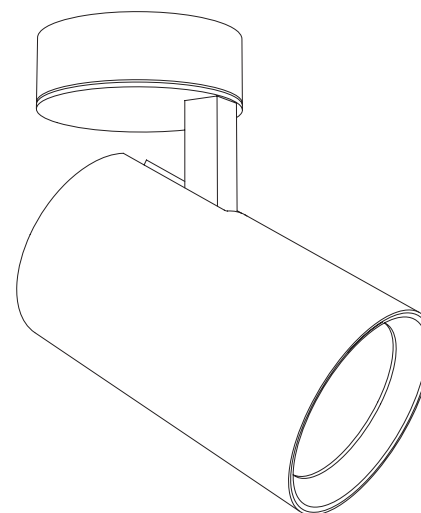

WICHTIG IMPORTANT

Montage nur durch einen autorisierten Elektroinstallateur! Niemals unter Spannung den Sekundäranschluss herstellen oder lösen!

Die Lichtquelle dieser Leuchte darf nur vom Hersteller, einem von ihm beauftragten Servicetechniker oder einer vergleichbar qualifizierten Person ersetzt werden.

Zur Vermeidung von Gefährdungen darf eine äußere flexible Leitung dieser Leuchte ausschließlich vom Hersteller, seinem Servicevertreter oder einer vergleichbaren Fachkraft ausgetauscht werden.

Die Isolation zwischen der Netz-Spannungversorgung und der Steuerleitung (1-10V, DALI) ist basisisoliert.

Das Dimmverhalten ist anhängig von den verwendeten Komponenten.

Mounting only by an authorized electrician! Never connect or disconnect the secondary connection under voltage!

Light source of luminaire is allowed to be replaced by manufacturer, a service technician commissioned by manufacturer or a person with equivalent qualifications only.

*To avoid danger, please change outer flexible lines only by an authorized electrician or comparable person.
 The insulation grade between power supply and control cable (1-10V, DALI) is basic.*

The Dimming behaviour depends on the components used.

■ seventies se-21-1/-4/-5

STROMSCHIENENSTRAHLER RAIL TRACK SPOTLIGHT

mawa®

