


less'n'more

Zeus Wall / Ceiling Light Z-BDL1

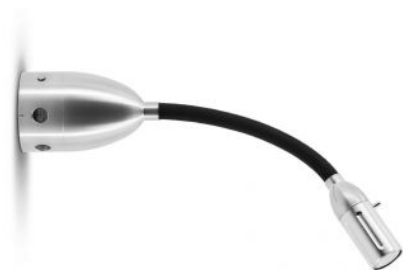

Dimmbarkeit

- Toque atenuadores en el dosel
- Regulable en el sitio con control de fase inversa


Oberfläche

- aluminio
- negro
- blanco

flexible_arm

- antracita textil
- aluminio
- verde textil
- rojo textil
- marrón textil
- blanco textil
- negro textil
- azul textil

Technical details

País de origen	 Alemania
Fabricante	less'n'more
Diseñador	less'n'more
Índice de protección / Protección IP	IP43
Contenido del paquete	LED
entrada de tensión	230 - 240 Volt
material	aluminio, vidrio
angulo del rayo	15 - 75 grados
Potencia en vatios	4,2 W
LED	incluyendo
Indice de reproduccion cromatica	90
El flujo luminoso en lm	450
Temperatura de color en grados Kelvin	2.700 extra blanco cálido
Dimensiones del dosel	7 cm
cabeza del alumbrado masa	3 cm
reemplazo de la bombilla:	en el sitio mismo
Dimensions	L max. 30 cm

Descripción

The Less'n'more Zeus Wall / Ceiling Light Z-BDL1 can be mounted on the wall or ceiling. It is built onto the surface. Its canopy / wall mounting made of aluminum has a diameter of 6.5 cm. This lamp has a flexible lamp arm that can be stretched and bent as desired. At maximum extension of the lamp arm, the lamp has a length of 30 cm. The flexible lamp arm is offered in these colours: aluminum, textile black, white, anthracite, blue, green, red and brown. An LED with a colour temperature of 2,700 Kelvin extra warm white is integrated in the lamp head.

The lamp head and the canopy are available in the surfaces aluminum and black. The Zeus Wall / Ceiling Light Z-BDL1 is offered on site dimmable with a trailing edge phase dimmer or with an integrated push button dimmer on the canopy. The version with push button dimmer can be switched and dimmed via the push button. The beam angle of the light can be continuously adjusted between 15 and 75 degrees. To do this, the glass lens is turned out of or into the lamp head. With a larger beam angle, the light is distributed over a larger area.

On request, this Zeus wall and ceiling lamp is also available with other colours for the flexible lamp arm or with a supply cable and safety plug for operation at a power socket. A larger lamp with a maximum length of 62 cm is also offered from the series. A canopy mounting plate is offered as an accessory, with which the lamp can be mounted over a flush-mounted box.