


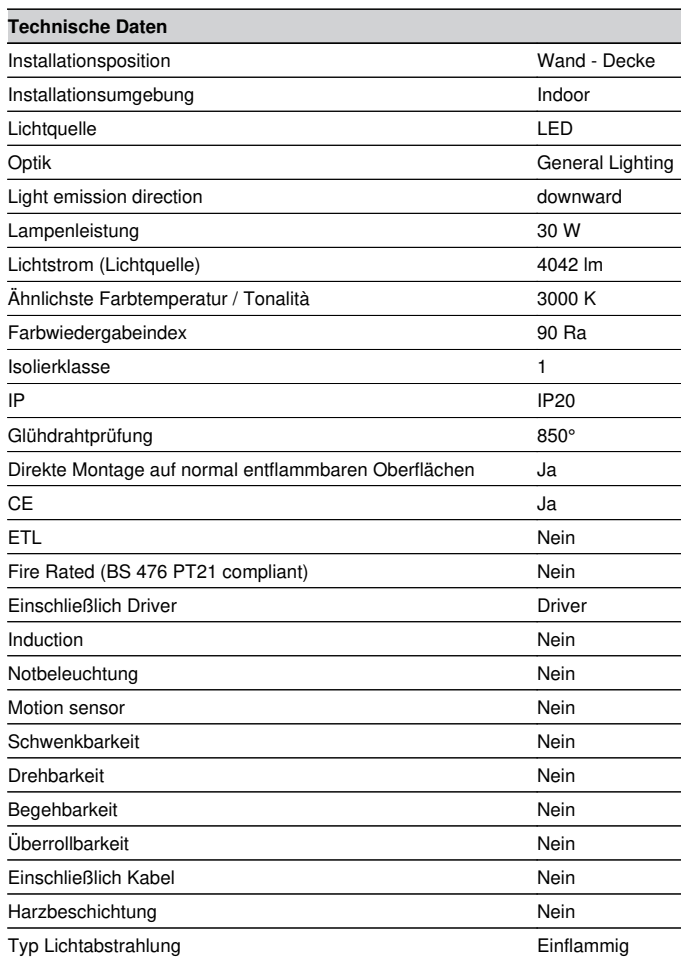

 C.C.
 
 | P>3 |
 






Deckenleuchten | 220-240 V | topLED 30 W 1000 mA | CRI 90
8530

Single emission ceiling lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 70 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 4042 lm, with a 134.7 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The diffuser is made of PC; the mounting frame is made of iron, with a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20;


The total absorbed power is 30 W.


The device features protection class I and can be wall lights or ceiling-mounted.

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	46 %
Lichtstrom (Lichtquelle)	4042 lm
Leuchten Lichtstrom	1862 lm
Consumption	30 W
Leuchten Lichtausbeute	62 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Life / Failure Ratio	
L80 B0 C20 80000h	

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 22
UGR axial	< 22

OPTICAL	
Light distribution simmetry	Symmetrical
Ottica C0/C180	154°

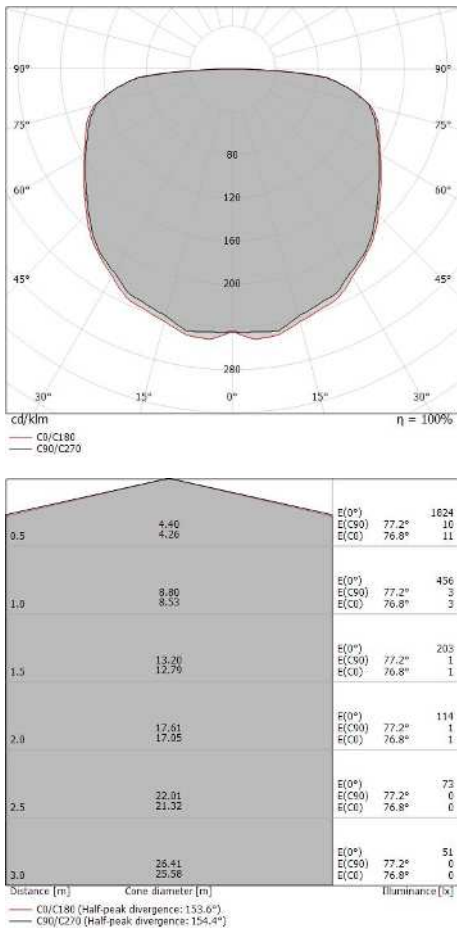



Dimmer
PUSH DIM, 220-240V

Code
KIT0026



Dimmer
Bluetooth, 85-240V

Code
KIT0080