


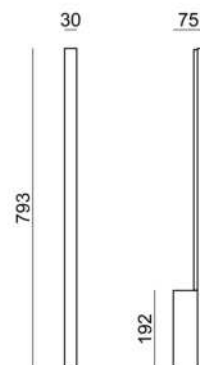

 G.C.
 
 |P>0|
 




Oberfläche Gehäuse

Material	Aluminium
Farbe	Weiß geprägt RAL 9003
Bearbeitungstyp	Lackierung

Oberfläche Diffusor	
Material	PMMA
Bearbeitungstyp	Sandstrahlen





Wandleuchten | 220-240 V | topLED 17 W 500 mA | CRI 90
7765

Single emission wall lights for indoor application. The warm white LED light source with a general lighting light distribution is composed of 60 topped LEDs with CCT of 3000 K and a CRI 90; the source luminous flux is 2100 lm, with a 123.5 lm/W nominal luminous efficacy and an operating lifetime (L80) of 80000 hours.

The device body is made of aluminium and features a embossed white ral 9003 finish, processed by means of coating; the diffuser is made of pmma with a sandblasting treatment. The ingress protection degree is IP20; the total weight is of 1.245 kg.

The total absorbed power is 17 W.

The device features protection class I and can be wall lights-mounted.

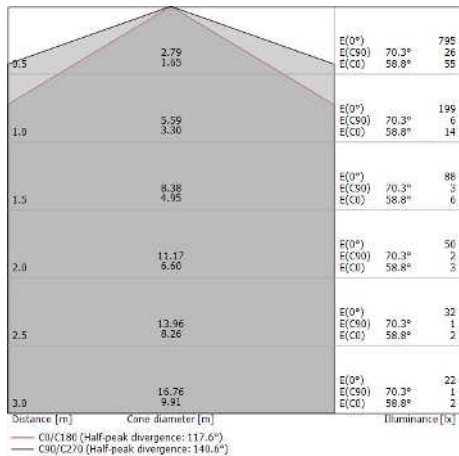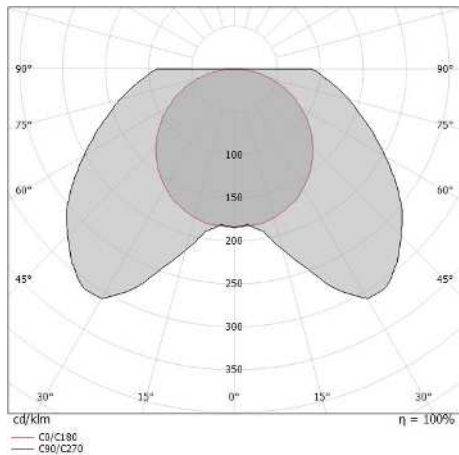

Illuminotechnical Eigenschaften	
Light Output Ratio (LOR)	51 %
Lichtstrom (Lichtquelle)	2100 lm
Leuchten Lichtstrom	1079 lm
Consumption	17 W
Leuchten Lichtausbeute	63 lm/W
Farbtemperatur	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Farbwiedergabeindex	90 Ra
Life / Failure Ratio	
L80 B20 C0 80000h	

UGR	
X=4H Y=8H	S=0.25H
Reflection factor	70/50/20
UGR transversal	< 28
UGR axial	> 28

OPTICAL	
Light distribution simmetry	Asymmetrical
Ottica C0/C180	118°
Ottica C90/C270	141°